

# LARGE FORMAT TILES TOOLS



Z. i. 2 - Via Cavatorta, 6/1 | 48033 Cotignola (Ra) | ITALY  
[www.battipav.com](http://www.battipav.com) | [sales@battipav.com](mailto:sales@battipav.com)

# BATTIPAV™


MACCHINE PER EDILIZIA | MACHINES FOR BUILDING

# LAMPO cut



Special profile rail, high resistance structure with rubber inserts:

- no scratches on the surface
- more stability during cut



Easy and fast connection



Supplied with 2 cutting wheels Ø 15 mm (key set included).



Robust and comfortable to use carriage with 3 nylon sliding pulleys with 3 ball-bearing.



Supplied with soft case.



Art. 11301  
Easy Break (included)

### System includes:

- 2 rails
- 3 suction cups
- 1 carriage
- 2 cutting wheels
- 1 Easy Break for tiles up to 25 mm of thickness
- 1 plier for 7 mm of thickness
- 1 soft bag

## BATTIPAV

## LAMPO CUT - Art. 11101/1

CUTTING LENGTH	3200 mm
CUTTING THICKNESS WITH PLIERS (art. 11302)	7 mm
CUTTING THICKNESS WITH PLIERS BATTIPAV (art. 11301)	25 mm
LENGTH OF THE SINGLE TRACK	1690 mm
PACKING DIMENSIONS	1800 x 210 x 170 mm
SUPPLIED IN SOFT BAG	•
NET WEIGHT	10,5 Kg

# MULTI bench



Quick and compact system to open and close the legs. The encumbrance is reduced at minimum.



Possibility to increase the length with an Extension Stand (art. 11202).



Compatible with Battipav PRIME / SUPREME electric saws using a JOINT SET (art. 11205).



Supplied with soft case for an easy transport.

It is possible to use **B-Lock Tile Locking System** (optional)



Art. 11204  
Joint for Multi Bench  
2 units (optional)



1525 mm



810 mm

Art. 11203  
Single aluminium profile  
available also as optional

## System includes:

- 2 stands with foldable legs
- 8 aluminum profiles with fixing screws (max. 11 profiles)
- 1 soft case


BATTIPAV	MULTI BENCH - Art. 11201
DIMENSIONS	1500 x 1525 x H810 mm
MAXIMUM LOAD CAPACITY	200 Kg
MAXIMUM LOAD CAPACITY WITH EXTENSION (art.11202)	300 Kg
PACKING DIMENSIONS	1760 x 291 x 275 mm
NET WEIGHT	29,3 Kg

# AGILE system




High quality professional suction cups with vacuum indicator. Resistant rubber with special design for perfect adherence on rough surfaces. Complete with support (Art. 11004/1).

Handles adjustable to the same level of the telescopic bar



Carriage for safe and easy movement, complete of wheels.

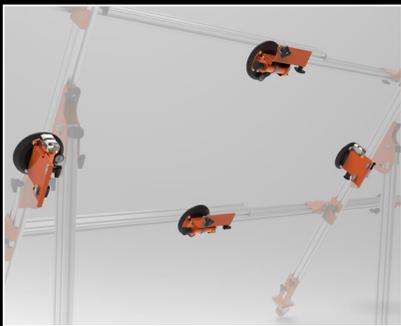

Quick system for a complete set up according to the slab dimension: lengthen and widen.



4 Antiscratch foot for horizontal position



Wheels, 2 are fixed and one is pivoting, for easy transport of the slabs

## System includes:

- 2 telescopic bar with 2 handles
- 6 suction cups
- Carriage included
- Wheels

BATTIPAV	AGILE SYSTEM - Art. 11001/1
MAXIMUM AND MINIMUM BARS LENGTH	3300 mm - 1720 mm
MAXIMUM AND MINIMUM BARS WIDTH	1580 mm - 840 mm
PACKING DIMENSIONS	1795 x 640 x 255 mm
CARRIAGE WITH WHEELS	•
NET WEIGHT	46,0 Kg


# AGILE LIGHT system



High quality professional suction cups with vacuum indicator. Resistant rubber with special design for perfect adherence on rough surfaces. Complete with support (Art. 11004/1).



Mechanism for telescopic bar.

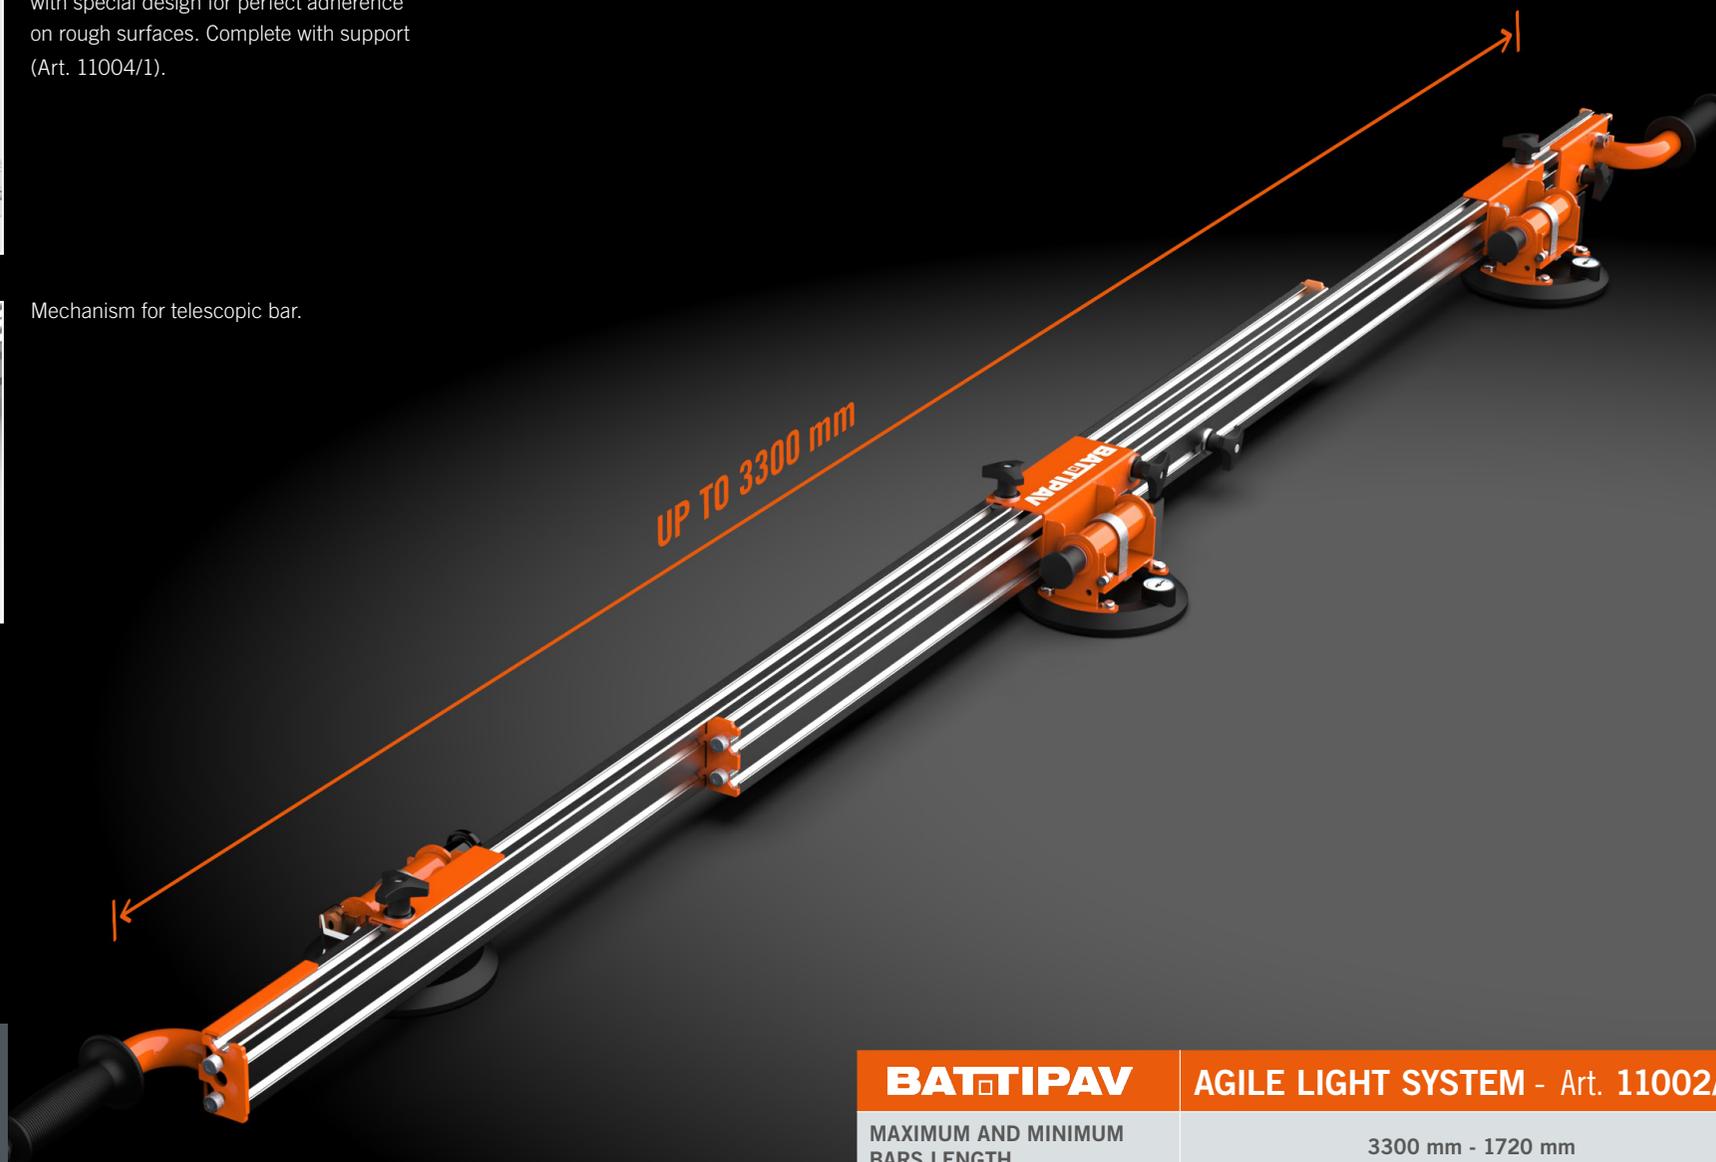

## System includes:

- 1 telescopic bar with 2 handles
- 3 suction cups

**BATTIPAV**

**AGILE LIGHT SYSTEM - Art. 11002/1**

MAXIMUM AND MINIMUM  
BARS LENGTH

3300 mm - 1720 mm


PACKING DIMENSIONS

1830 x 320 x 120 mm

NET WEIGHT


12,2 Kg

# PERFECT jolly

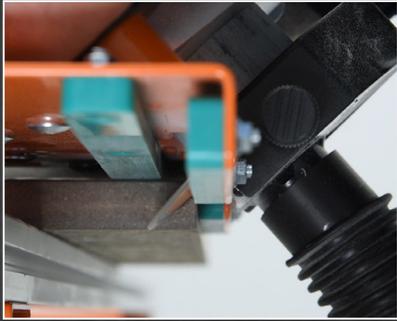

Adjustable bevel depth, with maximum cutting height of 21 mm, disc cover with dust extraction.

Available for North America  
shaft attachment  
5/8" 11 thread


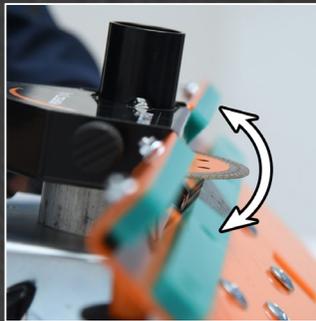


Adjustable cut for inclinations  
from 40° to 50°.



Strong structure, precise and fluid sliding with polyethylene pads, practical and comfortable handles on which to apply the pressure necessary for advancement.

Special indicator of perfect alignment at 45°

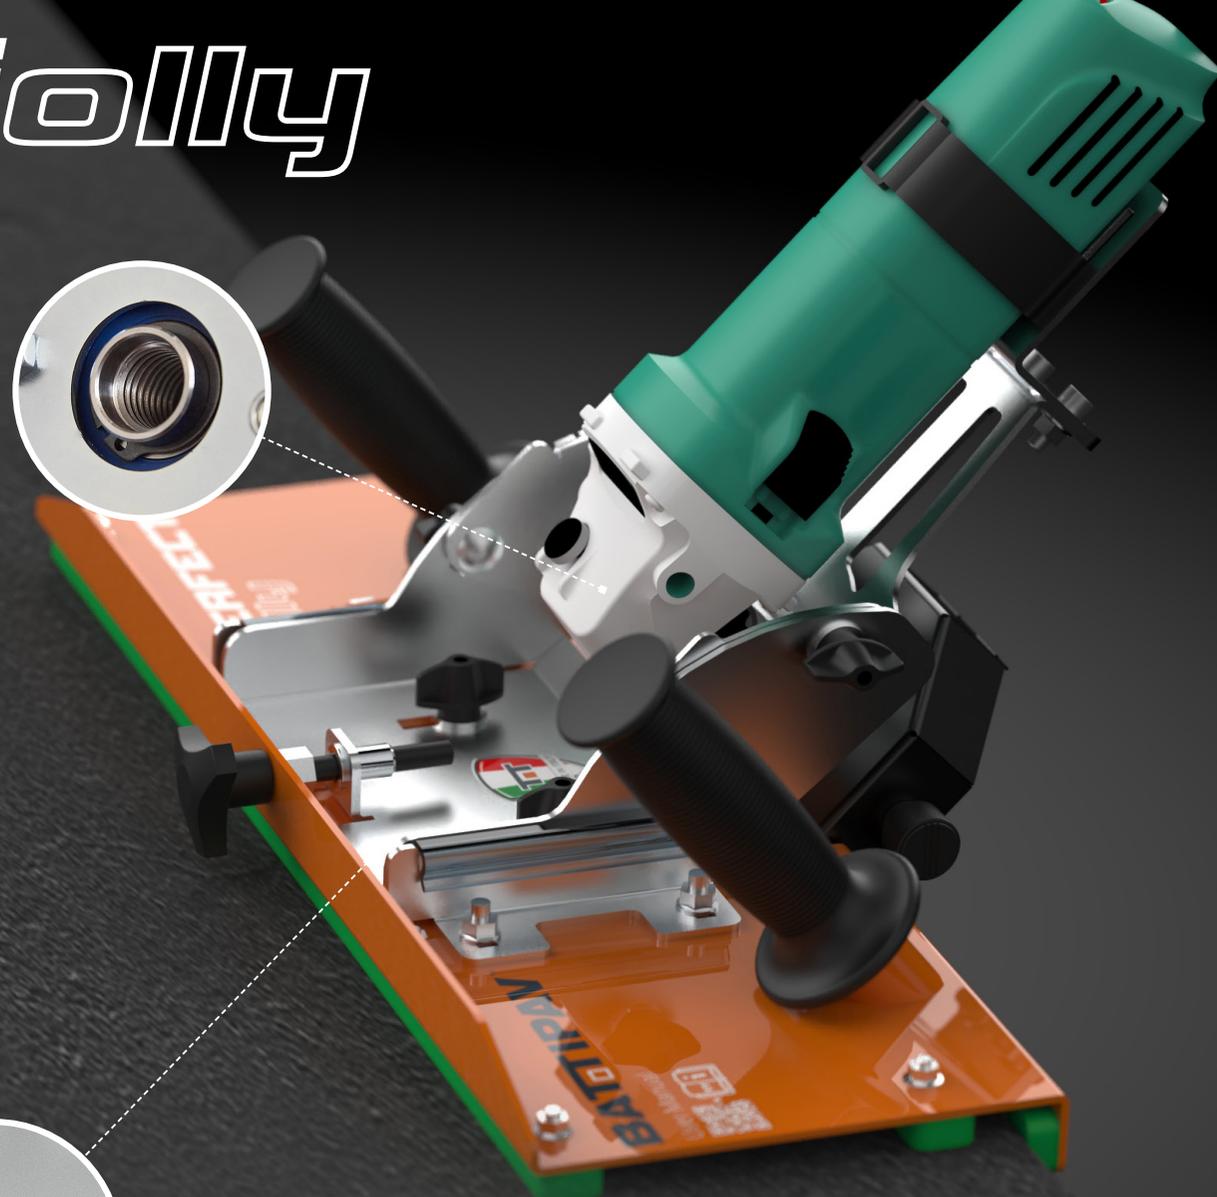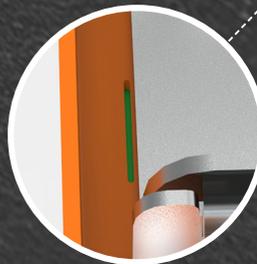

BATTIPAV	PERFECT JOLLY - Art. 11401
CUTTING LENGTH	∞
MAX CUTTING THICKNESS	21 mm
CUTTING ANGLE RANGE	40° - 50°
SHAFT ATTACHMENT	M14
PACKING DIMENSIONS	530 x 340 x 255 mm
RECOMMENDED DISC DIAMETER	Ø 115 mm
NET WEIGHT	4,9 Kg

# PULSE



PULSE is equipped with:  
suction cup and practical lever for a very fast "Pick & Place".  
Maximum 25 kg per tile.



Press the white rubberized button on the handle.  
The vibration intensity levels are regulated by a turning wheel.



Specific beating plate with angular shape for easy access of angles.

It was inspired by old vibrator model MiniVibro produced by Battipav in 70s.

## System includes:

- Resistant Light Chase
- Heavy Duty Battery
- Universal Charger
- Angular Beating plate

Angular Beating Plate included



Flexible Head  
for a perfect guidance

BATTIPAV	PULSE - Art. 11501
VOLTAGE	18V DC
CURRENT INTENSITY	2AH
POWER AVAILABLE	36WH
TYPE OF SERVICE	CONTINUOUS
RPM	MIN 500 - MAX 12.000
RPM REGULATION	ELECTRONIC CARD WITH 5-POSITION ROTARY VARIATOR
DRIVE TYPE	SURFACE FLUSH BUTTON WITH IP65 PROTECTION
MACHINE WEIGHT	PULSE 1202GR (WITHOUT BATTERY) BATTERY 384GR
SUCTION CUP DIAMETER	DIAMETER 130MM THICKNESS 7MM
ANGULAR PLATE DIMENSION	200X300X80MM

# SUCTION CUP




Fast pressure release

Vacuum indicator




Resistant Light Case

Resistant rubber with special design for perfect adherence on rough surfaces.

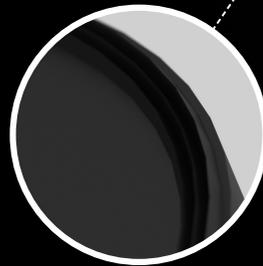


## System includes:

- Resistant Light Case
- High quality professional suction cup with vacuum indicator.



max 100 Kg



max 50 Kg

BATTIPAV	SUCTION CUP - Art. 11047
SUCTION CUP DIAMETER	Ø 150 mm
MAX ORIZONTAL LOAD	100 Kg
MAX VERTICAL LOAD	50 Kg