



TRANSPORT WHEELS

Easy to carriage



EXTENSION SIDE BENCH (art. 85015)

It is very practical when need to cut large size of tiles.

OPTIONAL



STORAGE

Built to reduce at the minimum the encumbrance during the carriage and above all the storage space.

VIP 2125

RADIAL TILE SAWS



Art. USA857/B

DIAMOND DISK	ø9.84 in c/c Special gres
ENGINE	115V 60Hz 1,8Hp/1,4kW
ROTATION SPEED	3400 rpm
MAX CUTTING LENGTH	49.21 in
MAX CUTTING DEPTH AT 90°	1.57 in
MAX CUTTING DEPTH AT 45°	1.38 in
MAX CUTTING DEPTH WITH 2 RUNS	3.15 in
MAX SIZE TILE FOR DIAGONAL CUT	34.65x34.65 in
WORKING TABLE DIMENSIONS	46.06x20.47 in
WATER RECYCLING PUMP TYPE	S1/A4 standard
KIT WHEELS	Included
DIMENSION MACHINE IN SERVICE	73.62x24.61x53.7 in
DIMENSION MACHINE IN STOCK	66.93x27.76x20.08 in
DIMENSION 4 MACHINES ON PALLET	68.9x28.35x86.22 in
NET WEIGHT	117.95 Lb

AUTHORIZED DEALER:




Z. i. 2 - Via Cavatorta, 6/1 | 48033 Cotignola (Ra) | ITALY
www.battipav.com | sales@battipav.com



June 2020

BATTIPAV™

MACCHINE PER EDILIZIA | MACHINES FOR BUILDING

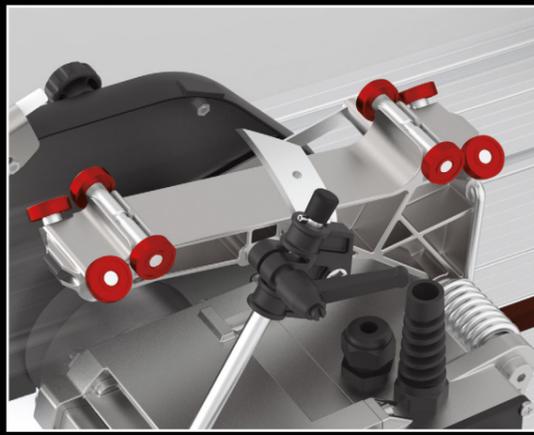

CARRIAGE ENGINE GROUP

The carriage motor group slides with 8 ball-bearings on interchangeable stainless steel track.



45° CUT

Very comfortable for the large frame. The B-LOCK System (art. 90262 optional) can be fixed on the worktop slot.



FRAME AND WORKTOP

Frame and the worktop in aluminium, are wider for a perfect stability and precision during the cutting. The special shape of the worktop allows an easy cleaning.



PLUNGING HEAD

The cutting head is plunging and can be locked at the intended height. It makes every kind of shape.

POWERFUL MOTOR



ORIGINAL RECYCLING PUMP

